# *GF3* Replacment fiberglass rod Ø 3 mm

Cable pulling system for pipe diameter 10–50 mm
Item no.: **20816** | **20817** | **20818**

VIDEO
GF3
Click here Video

KG 130









**Front End:** Guiding head with swivel and RTG Ø 6 mm front thread with kink-protection





**Rear end:** Kink protection with RTG Ø 6 mm inner thread

Click here Productinformation

Achtung! Stromleitend

Repair instruction

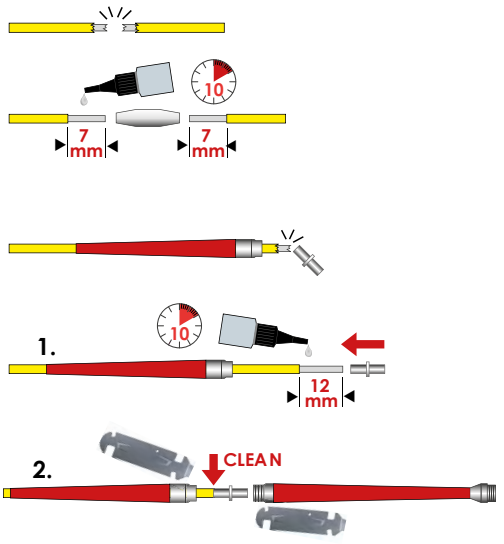


| Rod | rec. pipe ID | Bending radius w.e. joint | Bending radius rod | Breaking load | Total breaking load |
|---|---|---|---|---|---|
| Ø |  |  |  |  |  |
| 3 mm | 9 – 45 mm | 38 mm | 28 mm | 450 kg | 130 kg |

## DATA

| ITEM NO. | **20816** | **20817** | **20818** |
|---|---|---|---|
| LENGTH | 20 m | 30 m | 50 m |
| WEIGHT | 0,25 kg | 0,35 kg | 0,55 kg |
| MATERIAL ROD | Fiberglass core with PP sheath | | |
| BENDING RADIUS | 38 mm | | |
| PIPE INNER Ø | optimal from 9 mm - 45 mm | | |
| DIMENSION | H: 30 mm, Ø 400 mm | | |
| EAN CODE | 9120045477184 | 9120045477191 | 9120045477207 |

## ADVANTAGES

- Guiding head with swivel and kink protection
- Shear-stable
- Also for occupied pipes
- Bending radius 38 mm
- Total breaking load 130 kg

## INFORMATION


Matching products

**GF3 Cable pulling system**
20 m - Item no.: 10192
30 m - Item no.:10193
50 m - Art.-Nr.: 10195



Click here Productinformation

**GF3 Reparing Kit**
Item no.: 20819

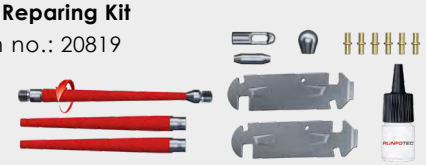

Click here Productinformation

## DESCRIPTION

Replacement glass fibre rod GF3 Ø 3 mm with kink protection ending joint made of stainless steel and guiding head with twist adjustment and pulling eye Ø 7 mm with RTG Ø 6 mm thread. The specified total breaking load of 130 kg always refers to the entire product (glass fibre rod incl. kink protection ending joints).

**Optimal field of application:** for pipe inner dimension 9 mm - 45 mm.

**Scope of supply:** 1 x Replacement glass fibre rod GF3 Ø 3 mm, kink-protection-ending joint on both side (Beginning/ Ending), 1 x guiding head with twist adjustment, 1 x pulling eye Ø 7 mm, 2 x mounting-wrenches