GF11 *Replacement fiberglass rod Ø 11 mm*

Cable pulling system for pipe diameter 80–250 mm
Item no.: **20386** | **20417** | **20418** | **20419** | **20420** | **20421**


VIDEO
GF11
Click here Video

KG 580





Click here Productinformation

Repair instruction coupling joint

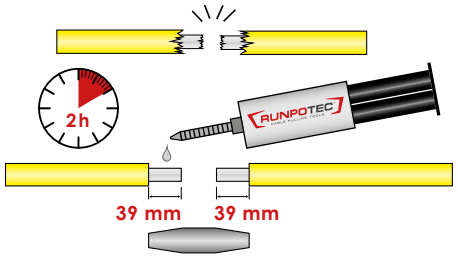

Repair instruction ending joint

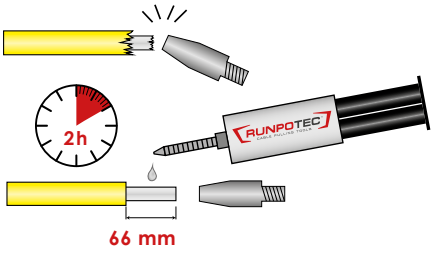

Rod	Rec. pipe diameter	Bending radius	Bending radius rod	Breaking load	Total breaking load
Ø					
11 mm	80 - 250 mm	770 mm	210 mm	6200 kg	580 kg

DATA

ITEM NO.:	20386	20417	20418	20419	20420	20421
LENGTH	100 m	120 m	150 m	200 m	250 m	300 m
WEIGTH	13,50 kg	16,20 kg	20,25 kg	27,00 kg	33,75 kg	40,50 kg
MATERIAL ROD	Fiberglass core with PP sheath					
BENDING RADIUS	770 mm					
PIPE Ø	optimal from 80 - 250 mm					
DIMENSION	H 240 mm x DM 1000 mm					
TOTAL BREAKING LOAD	580 kg					

ADVANTAGES

- Fiberglass rod breaking load 6200 kg
- Total breaking load 580 kg
- Bending radius with ending joint 770 mm
- Bending radius only rod 210 mm
- Pipe diameter 80 - 250 mm

DESCRIPTION

The GF11 replacement fiberglass rod Ø 11 mm is equipped with end sleeves on both sides and has an RTG thread Ø 12 mm. The breaking load of the fiberglass rod is 6200 kg, the total breaking load is 580 kg. The bending radius with sleeve is 770 mm.

Optimal field of application: for pipe diameters 50 mm - 120 mm

Application video: a short, very informative application video can be viewed by scanning the QR code or on www.RUNPOTEC.com.

Scope of supply: 1 x GF11 Replacement fiberglass rod Ø 11 mm, ending joint on both sides (start/end)

INFORMATION

Suitable products:

GF11 Fiberglass rod Ø 11 mm
100 m - Item no.: 10092
120 m - Item no.: 10093
150 m - Item no.: 10094
200 m - Item no.: 10095
250 m - Item no.: 10096
300 m - Item no.: 10097



Click here Productinformation

GF11 Repairing Kit
Item no.: 20424



Click here Productinformation