
GF4.5 *Replacement fiberglass rod Ø 4,5 mm*

Cable pulling system for pipe diameter 30–80 mm
Item no.: **20311** | **20312** | **20313**| **20314**| **20315**


VIDEO
GF4.5
Click here Video

KG 220

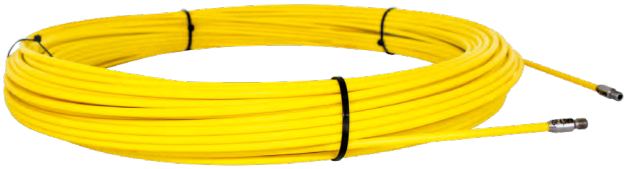




Click here Productinformation

Repair instruction coupling joint

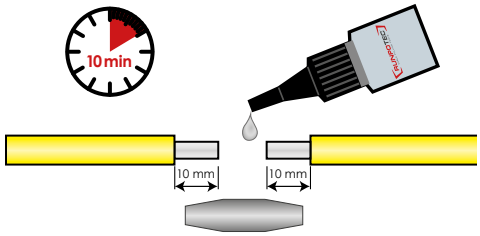

Repair instruction ending joint

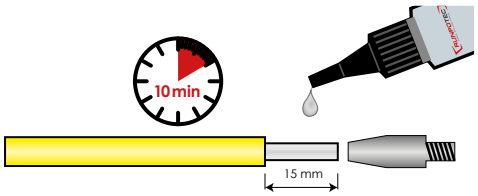

Rod	Rec. pipe diameter	Bending radius	Bending radius rod	Breaking load	Total breaking load
Ø					
4,5 mm	30 - 80 mm	120 mm	55 mm	1300 kg	220 kg

DATA

ITEM NO.:	20311	20312	20313	20314	20315
LENGTH	30 m	40 m	50 m	60 m	80 m
WEIGTH	0,72 kg	0,96 kg	1,20 kg	1,44 kg	1,92 kg
MATERIAL ROD	Fiberglass core with PP sheath				
BENDING RADIUS	120 mm				
PIPE Ø	optimal from 30 - 80 mm				
DIMENSION	H 80 mm x DM 330 mm				
TOTAL BREAKING LOAD	220 kg				

ADVANTAGES

- Fiberglass rod breaking load 1300 kg
- Total breaking load 220 kg
- Bending radius with ending joint 120 mm
- Bending radius only rod 55 mm
- Pipe diameter 30 - 80 mm

DESCRIPTION

„The GF4.5 replacement fiberglass rod Ø 4.5 mm is equipped with end sleeves on both sides and has an RTG thread Ø 6 mm. The breaking load of the fiberglass rod is 1300 kg, the total breaking load is 220 kg. The bending radius with sleeve is 120 mm.

Optimal field of application: for pipe diameters 30 mm - 80 mm.

Application video: a short, very informative application video can be viewed by scanning the QR code or on www.RUNPOTEC.com.

Scope of supply: 1 x GF4.5 Replacement fiberglass rod Ø 4,5 mm, ending joint on both sides (start/end)

INFORMATION

Suitable products:

GF4.5 Fiberglass rod Profi-Set
30 m - Item no.: 10052
40 m - Item no.: 10055
50 m - Item no.: 10057
60 m - Item no.: 10047
80 m - Item no.: 10050



Click here Productinformation

GF4.5 Fiberglass rod Standard-Set
30 m - Item no.: 10054
40 m - Item no.: 10056
50 m - Item no.: 10058
60 m - Item no.: 10048
80 m - Item no.: 10051



Click here Productinformation

GF4.5 Repairing Kit
Item no.: 20250



Click here Productinformation