GF7.5 *Replacement fiberglass rod Ø 7,5 mm*

Cable pulling system for pipe diameter 50–120 mm
Item no.: **20368** | **20369** | **20370** | **20371** | **20372** | **20414**


VIDEO
GF7.5 / GF9
Click here Video

KG 400
Ø 7,5 mm





Click here Productinformation

Repair instruction coupling joint

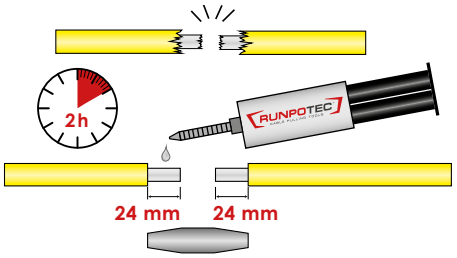

Repair instruction ending joint

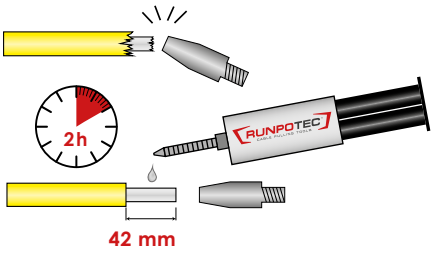

Rod	Rec. pipe diameter	Bending radius	Bending radius rod	Breaking load	Total breaking load
Ø					
7,5 mm	50 - 120 mm	500 mm	115 mm	3400 kg	400 kg

DATA

ITEM NO.:	**20368**	**20369**	**20370**	**20371**	**20372**	**20414**
LENGTH	40 m	50 m	60 m	80 m	100 m	120 m
WEIGTH	2,60 kg	3,25 kg	3,90 kg	5,20 kg	6,50 kg	7,80 kg
MATERIAL ROD	Fiberglass core with PP sheath					
BENDING RADIUS	500 mm					
PIPE Ø	optimal from 50 - 120 mm					
DIMENSION	H 110 mm x DM 730 mm					
TOTAL BREAKING LOAD	400 kg					

ADVANTAGES

- Fiberglass rod breaking load 3400 kg
- Total breaking load 400 kg
- Bending radius with ending joint 500 mm
- Bending radius only rod 115 mm
- Pipe diameter 50 - 120 mm

DESCRIPTION

The GF7.5 replacement fiberglass rod Ø 7,5 mm is equipped with end sleeves on both sides and has an RTG thread Ø 12 mm. The breaking load of the fiberglass rod is 3400 kg, the total breaking load is 400 kg. The bending radius with sleeve is 500 mm.

Optimal field of application: for pipe diameters 50 mm - 120 mm

Application video: a short, very informative application video can be viewed by scanning the QR code or on www.RUNPOTEC.com.

Scope of supply: 1 x GF7.5 Replacement fiberglass rod Ø 7,5 mm, ending joint on both sides (start/end)

INFORMATION

Suitable products:

GF7.5 Fiberglass rod Ø 7,5 mm

40 m - Item no.: 10076
50 m - Item no.: 10077
60 m - Item no.: 10078
80 m - Item no.: 10079
100 m - Item no.: 10080
120 m - Item no.: 10091



Click here Productinformation

GF7.5 Repairing Kit

Item no.: 20384



Click here Productinformation